

A WORLD OF SOLUTIONS

THESE PRODUCTS ARE CERTIFIED:



SMART SOLUTIONS FOR THE LABELING INDUSTRY

UNWINDER & REWINDER FOR EPSON C7500 PRINTERS



LABEL REWINDER (ASDIII-SO) - Epson C7500 printer - LABEL UNWINDER (ASSIII-SO)
(Not included)

The new Unwinding/Rewinding system for Epson C7500 Label Printer can handle media up to 127mm wide and unwind/rewind label rolls having outside diameter up to 250mm. Units are equipped with a 3" or adjustable core holder (40-118mm).

The printer feet should fit into notches on the printer plate. This way the correct unwinding / rewinding operations are guaranteed and units are safely connected to the printer.

An external power supply 100/240VAC - 2.5A \square at 24V allows an electronic circuit to provide, through the tension arm, the adjustment of the rotation speed and rotation direction. A 2A fuse is used as protection.

The unwinder and rewriter for Epson C7500 printers have two types of speed adjustments: it is possible to set the main speed through a knob and the tension arm automatically adjusts the speed from zero, up to the desired speed. When the roll runs out, each device stops beeping.

LABEL UNWINDER


The position of the tension arm is calibrated as follows:

- When the printer forwards the media for printing, the tension arm goes up, the device unwinds the media.
- When the tension arm is in the middle position, the device is idle.
- When the printer pulls back the media, the tension arm goes down, the device rewinds it.

LABEL REWINDER

The position of the tension arm is calibrated as follows:

- When the printer forwards the media for printing, the tension arm goes down, the device rewinds the media.
- When the tension arm is in the middle position, the device is idle.
- When the printer pulls back the media, the tension arm goes up, the device unwinds it.

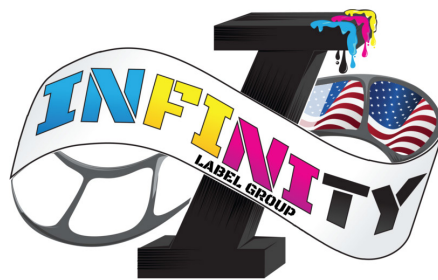

Integrated Productivity Systems, LLC

416 N Spring Garden St. Ambler, PA 19002

(844) 477-4911 | www.ipsiscan.com



LW-RW printer plate for Epson C7500