IPSi

T-300 Automatic Tabletop Bagger

Our smallest, fully automatic bagger offers increased production capabilities. We pack a lot of features into this bagger, including touch-screen operation, "pop-up" messaging, job save/recall and automatic/paced operation.

Automatic indexing, sealing, tear-off or continuous strips of bags are possible.

Available options include the BF-10 Bag Deflator, CF-10 Counting Funnel, CS-10 Compartment Seal, LS-10/LS-15 Load Shelves, BL-10 Blow Off Assembly, Hand Scanners, Stainless Steel Funnels and Height-Adjustable Cart with Quick Change Bag Bars (shown below).

Height-Adjustable Cart

T-300 & T-375 Special Features:
- Full color screen with pop-up windows
- Diagnostic and troubleshooting screens
- Preset and totalizing bag counter
- Automatic "paced" operation with fill time delay timer
- Universal, adjustable parts chute
- Adjustable support shelf
- Blower with flow controls
- One year limited parts warranty

T-375 Automatic Tabletop Bagger/Printer
"Next Bag Out"

In addition to all the features of the T-300, the T-375 incorporates a thermal transfer printer for "Next-Bag-Out" printing. This patented feature allows for printing just prior to loading, which guarantees accurate labeling and allows for quick changeovers on even the smallest batches. The seamless transition is also perfect for pharmaceutical applications when accurate labeling is vital.
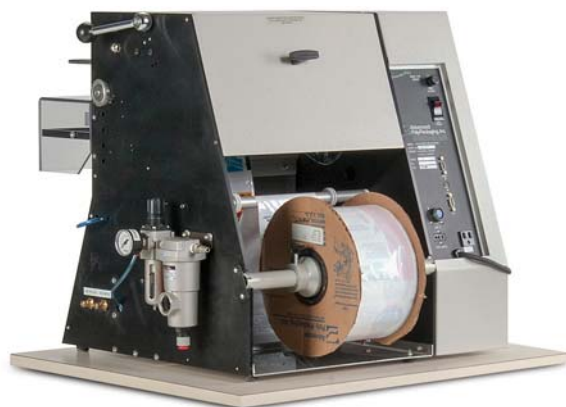

Actual Bag Samples

Specifications

Description	T-300/T-375
Seal mechanism	1/8" Solid heater bar (thermocouple controlled)
Cycle operation	Manual/Automatic
Guard-switch feature	Standard
Product pass-through	3" (can be increased)
Electric	110V/60hz (220V/230V, 50/60hz)
Dimensions	22" wide x 20" deep x 22" high

	T-300	T-375
Cycle rate	Up to 50 bags per minute	Up to 30 bags per minute
Bag size range	2" x 2" up to 11" x 16"	2" x 3" up to 11" x 16"
Index speed	25" per second	12" per second (with printer on)
Air*	50psi	60psi
Weight	110 lbs	125 lbs

* An "air-free" model is also available.

T-375 Printer Specifications:
Zebra 110Xi IV Series Printer, 203 dpi
305 dpi and 600 dpi, optional
4" x 12" print area or 5" x 12", optional
Built in memory for storage (999 labels)
16 MB SDRAM; 8 MB non-volatile Flash memory