



LABELMILL

print+apply



INTEGRATED
PRODUCTIVITY
SYSTEMS



(844) 477-4911 | www.ipsiscan.com

LM1012TTS

TABLE-TOP LABEL APPLICATOR

The LabelMill 1012TTS is a semi-automatic table-top label applicator which features fast, easy changeover to meet a variety of labeling needs. Using the unique rail-mounted modules, the LabelMill 1012TTS can serve as a label dispenser, tamp applicator, round product applicator, and flag applicator. Because this unit can do them all, there is no need for additional units for each type of application. Change over from one application to another in five minutes or less. The LM1012TTS is built for heavy-duty industrial use. The integrated operator interface makes change over and control adjustments quick and easy!

- Modular Design
- Label Dispenser
- Tamp Applicator
- Flag Applicator
- Round Product Applicator
- Auto-Round Module
- User-Friendly Operating Software
- Batch & Total Counters
- Integrated User Interface
- Custom Product Fixtures
- Optional Smart Tamp
- Optional System Widths
- Loose Loop Interface to Thermal Desktop & Color Inkjet Printers



**MADE IN
U.S.A**
PRODUCT

LabelMill

2416 Jackson Street

Savanna, IL 61074

800-273-4707

www.labelmill.com

info@labelmill.com





LABELMILL

print+apply



INTEGRATED
PRODUCTIVITY
SYSTEMS



(844) 477-4911 | www.ipsiscan.com

LM1012TTS

TABLE-TOP LABEL APPLICATOR

STANDARD APPLICATOR SPECIFICATIONS

LABELING SPEED / THROUGHPUT RATE

UP TO 45 PER MINUTE

LABEL PLACEMENT TOLERANCE

UP TO +/- 1/32" WHEN LABELS ARE PRODUCED TO SPECIFICATIONS & PRODUCT HANDLING IS CONTROLLED

ELECTRICAL INPUT

90-220VAC / 50-60HZ -- 2 AMPS

LABEL ROLL CAPACITY

12" MAX OUTSIDE DIAMETER, WOUND ON A 3" CORE. DIE-CUT, WASTE REMOVED, MINIMUM 1/8" SEPARATION BETWEEN LABELS

AIR REQUIREMENTS

80 PSI / 3 CFM REQUIRED

ACCEPTABLE LABEL SIZES

MINIMUM 1/2" WIDE x 1/2" LONG
MAXIMUM 6.5" WIDE x 14" LONG (LARGER OPTIONS AVAILABLE)

APPLICATION METHODS

TAMP, ROUND, FLAG, CLAMSHELL-FLAG & AUTOROUND

ENVIRONMENT

OPERATING 40-105 DEGREES F (5-40 DEGREES C)
15-85% RELATIVE HUMIDITY, NON-CONDENSING

FOOTPRINT

20" WIDE x 26" DEEP x 24" HIGH

WEIGHT

45 LBS. PLUS MODULE WEIGHT
(APPROXIMATELY 5-7 LBS. EACH)

OPTIONAL FEATURES

- 8.5" WIDE LABEL MAXIMUM
- 10.5" WIDE LABEL MAXIMUM
- CUSTOM PRODUCT FIXTURES
- PRECISION X-Y ADJUSTMENT TABLE
- SMART TAMP (AUTO-RETRACT)
- TAPERED ROLLER UPGRADE
- TWO-HAND ANTI TIE-DOWN INPUT
- CUSTOM CONFIGURATIONS
- PRINT & APPLY WHEN LOOSE-LOOPED WITH THERMAL PRINTER OR COLOR INKJET



LabelMill


2416 Jackson Street

Savanna, IL 61074


800-273-4707

www.labelmill.com


-TAMP MODULE-

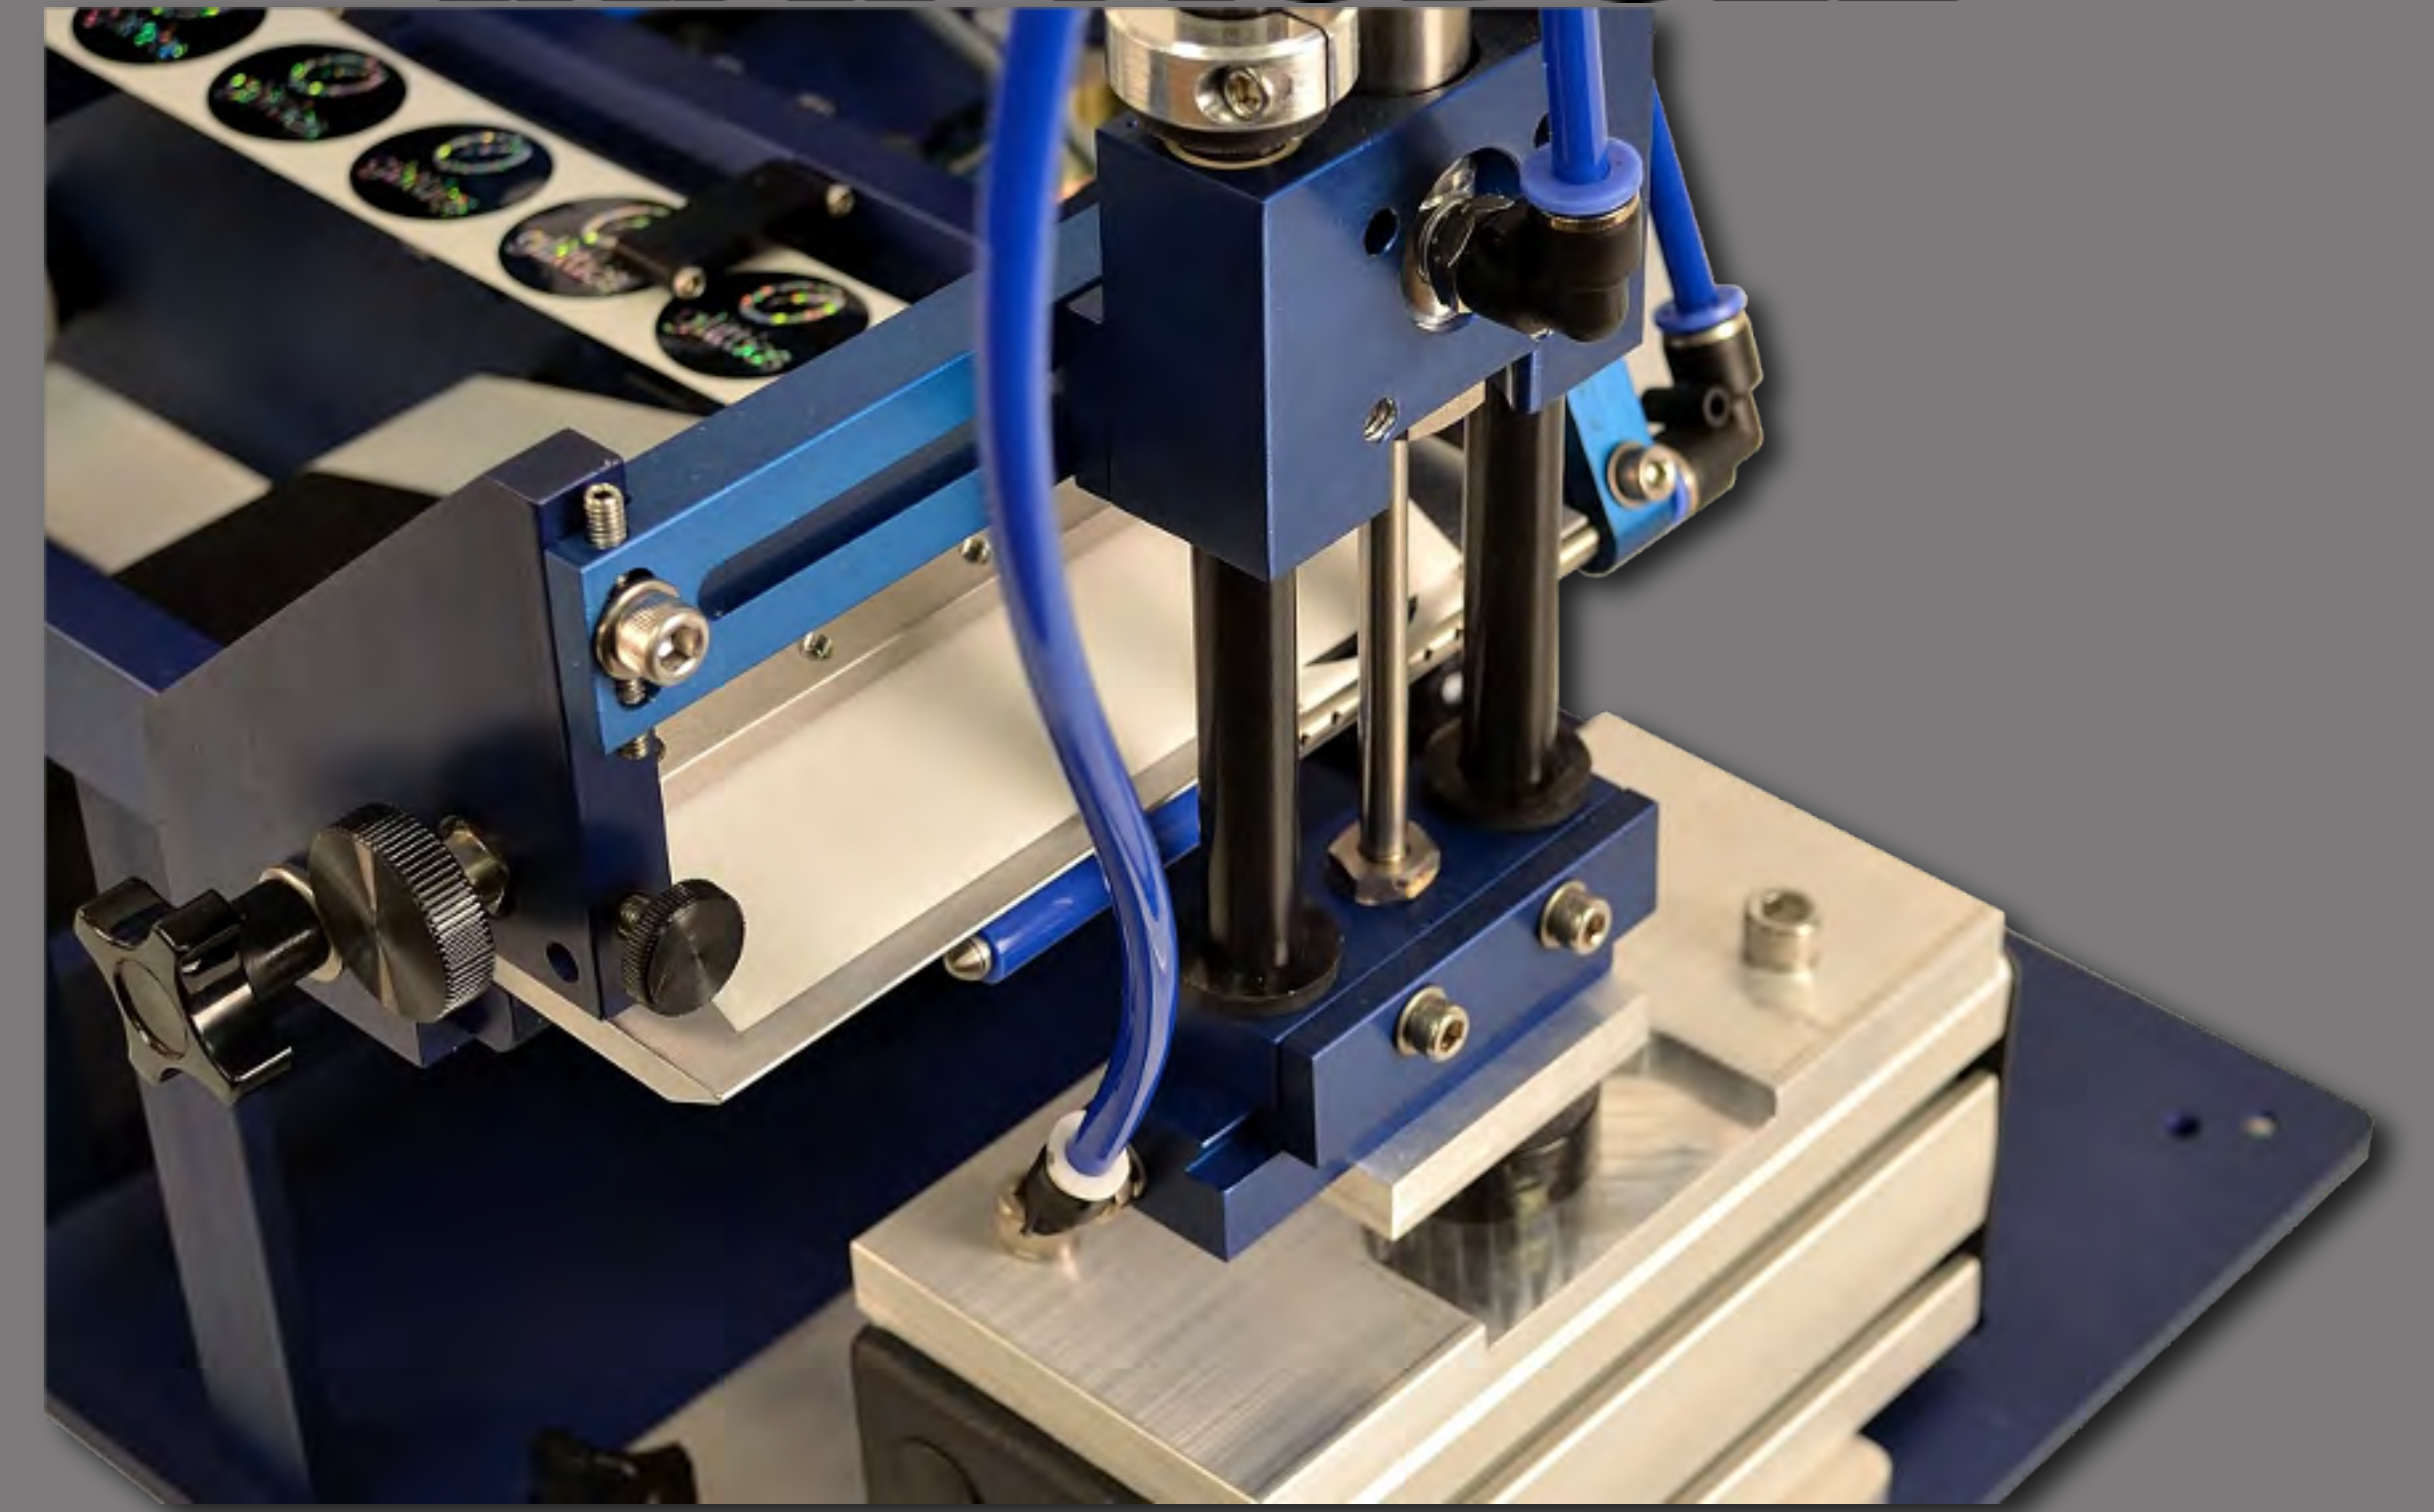


-FLAG MODULE-

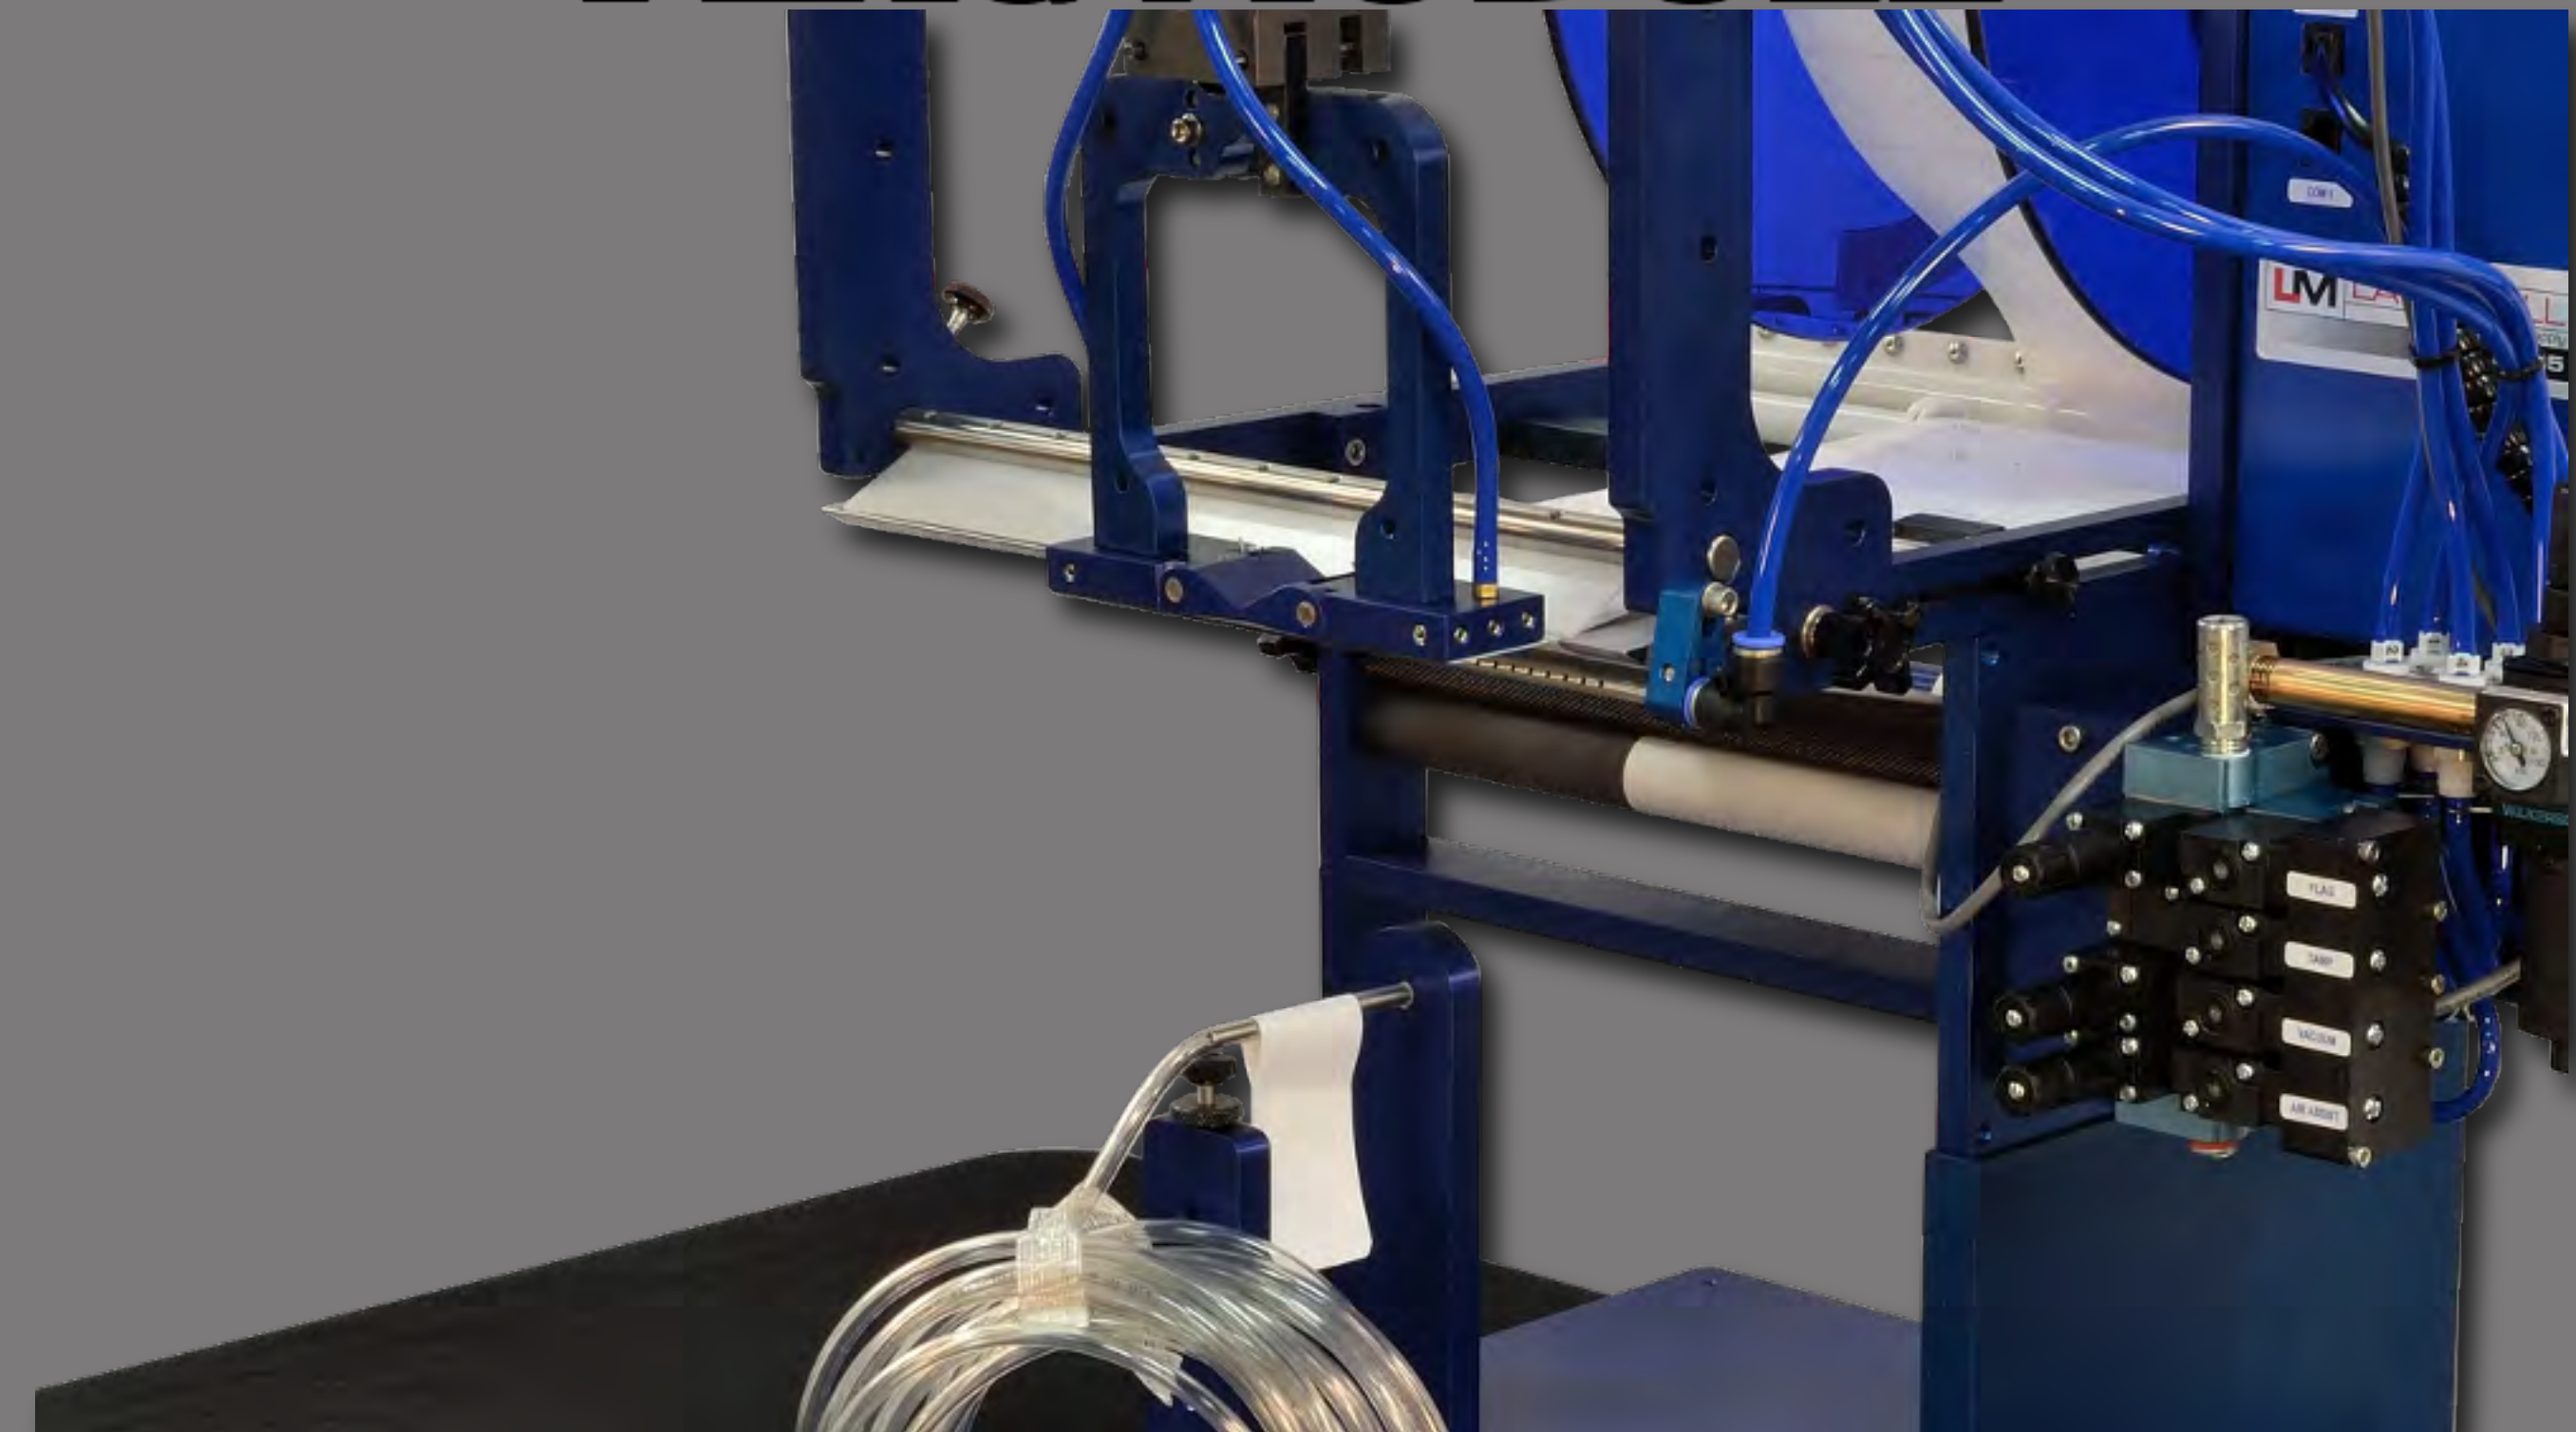

-ROUND MODULE-

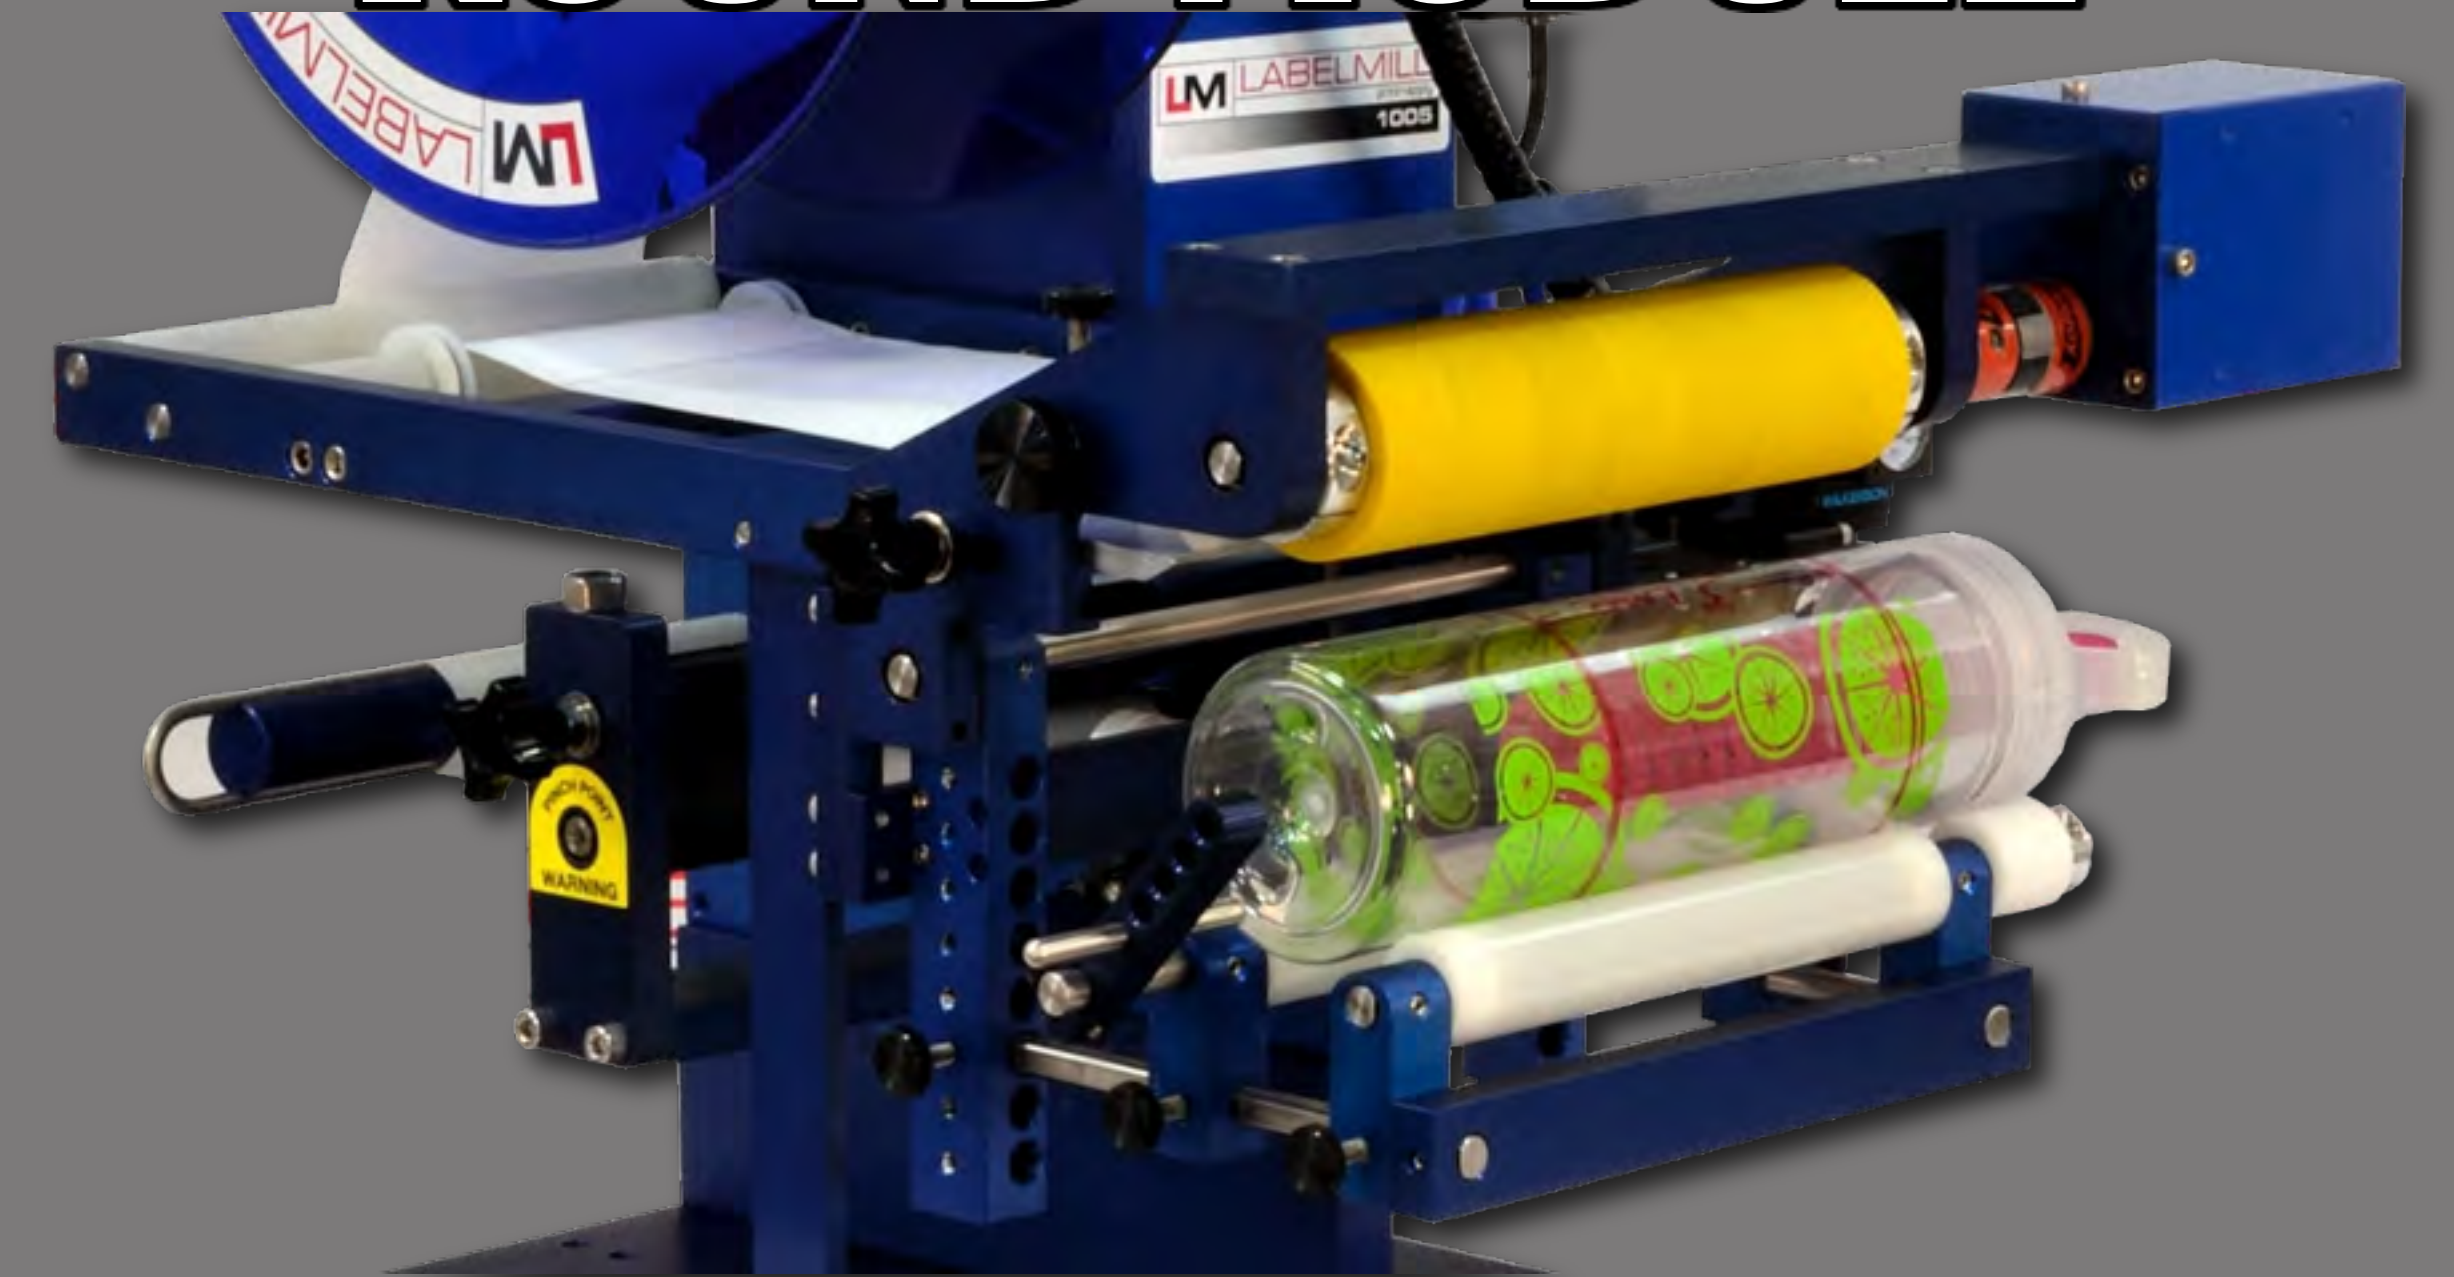

-AUTO ROUND-

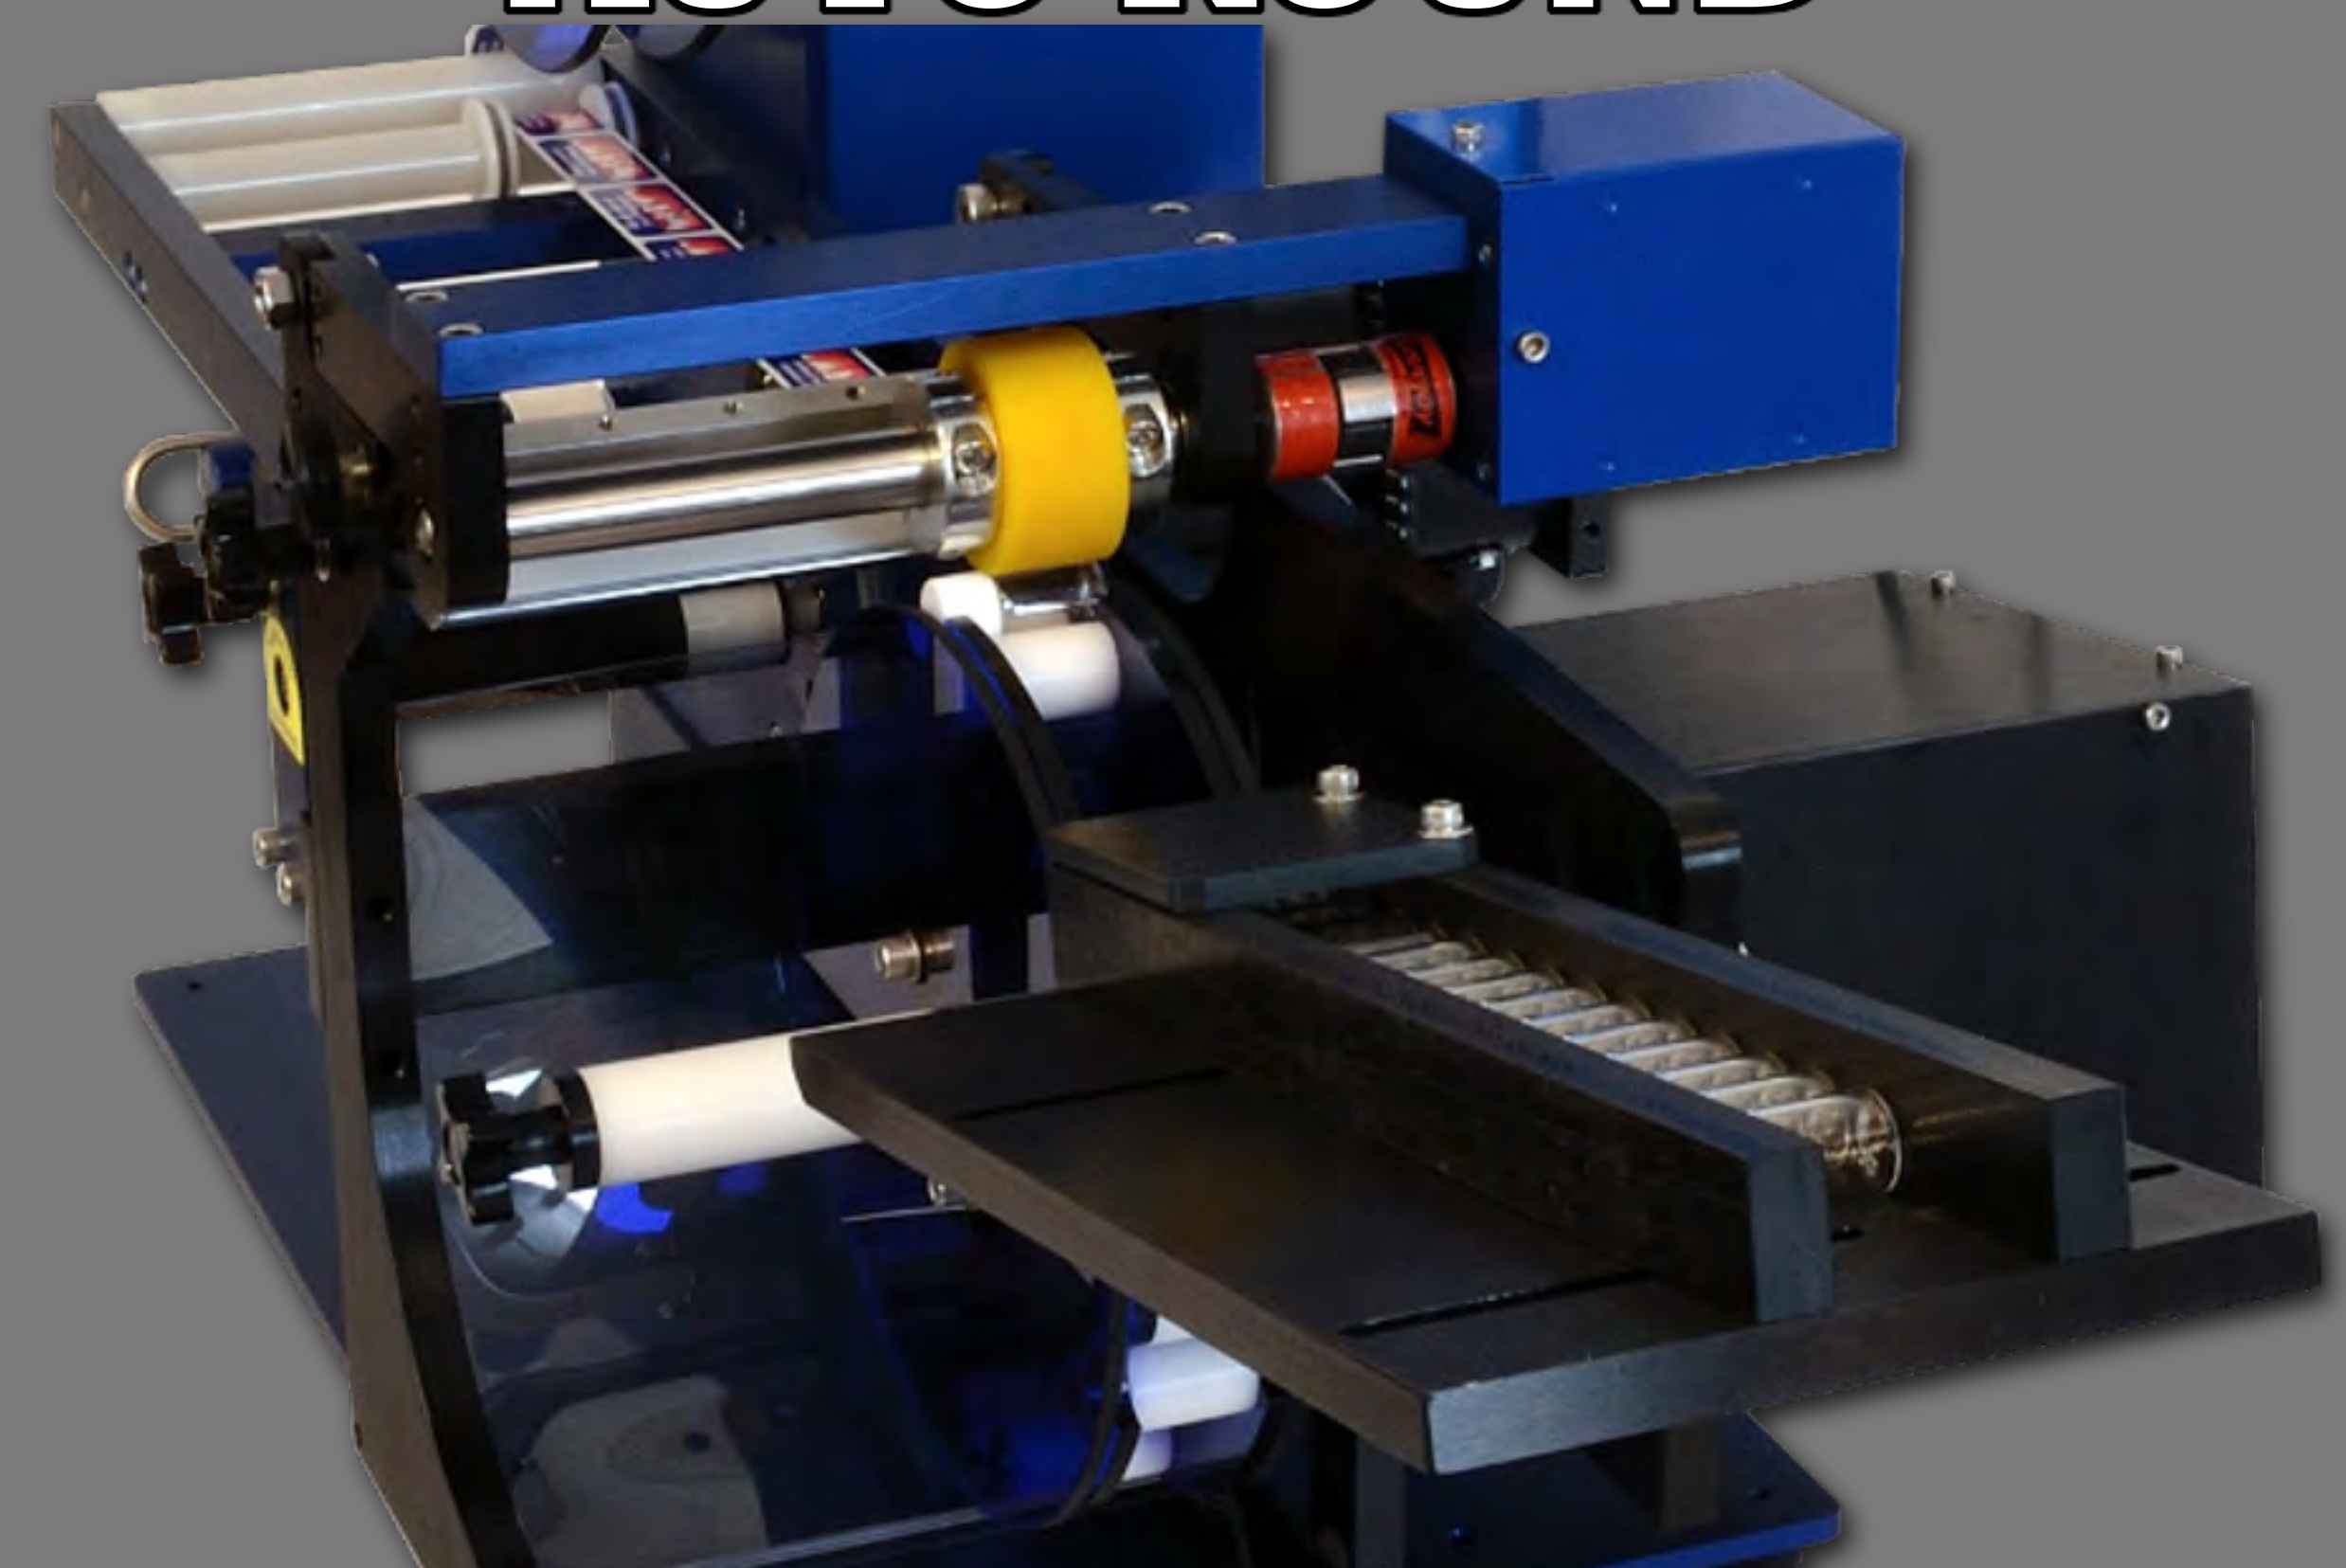

This datasheet is for informational purposes only. MM2 makes no warranties, expressed or implied in this summary. Specifications are subject to change without notice. LabelMill is a registered trademark of Mills Machine II, Inc. © 2022 MM2. All rights reserved.