# LABELIMILL print+apply



## LM1012TTS

### TABLE-TOP LABEL APPLICATOR

The LabelMill 1012TTS is a semi-automatic table-top label applicator which features fast, easy changeover to meet a variety of labeling needs. Using the unique rail-mounted modules, the LabelMill 1012TTS can serve as a label dispenser, tamp applicator, round product applicator, and flag applicator. Because this unit can do them all, there is no need for additional units for each type of application. Change over from one application to another in five minutes or less. The LM1012TTS is built for heavy-duty industrial use. The integrated operator interface makes change over and control adjustments quick and easy!

Label Dispenser
Tamp Applicator
Flag Applicator
Round Product Applicator
Auto-Round Module
User-Friendly Operating Software
Batch & Total Counters
Integrated User Interface
Custom Product Fixtures
Optional Smart Tamp
Optional System Widths
Loose Loop Interface to Thermal
Desktop & Color Inkjet Printers







LabelMill
2416 Jackson Street
Savanna, IL 61074
800-273-4707

www.labelmill.com
info@labelmill.com





### LABELINIL print+apply





# LM1012TTS TABLE-TOP LABEL APPLICATOR

### STANDARD APPLICATOR SPECIFICATIONS

#### LABELING SPEED / THROUGHPUT RATE

UP TO 45 PER MINUTE

#### LABEL PLACEMENT TOLERANCE

UP TO +/- 1/32" WHEN LABELS ARE PRODUCED TO SPECIFICATIONS & PRODUCT HANDLING IS CONTROLLED

#### **ELECTRICAL INPUT**

90-220VAC / 50-60HZ -- 2 AMPS

#### LABEL ROLL CAPACITY

12" MAX OUTSIDE DIAMETER, WOUND ON A 3" CORE. DIE-CUT, WASTE REMOVED, MINIMUM 1/8" SEPARATION BETWEEN LABELS

#### AIR REQUIREMENTS

80 PSI / 3 CFM REQUIRED

#### ACCEPTABLE LABEL SIZES

MINIMUM 1/2" WIDE x 1/2" LONG MAXIMUM 6.5" WIDE x 14" LONG (LARGER OPTIONS AVAILABLE)

#### **APPLICATION METHODS**

TAMP, ROUND, FLAG, CLAMSHELL-FLAG & AUTOROUND

OPERATING 40-105 DEGREES F (5-40 DEGREES C) 15-85% RELATIVE HUMIDITY, NON-CONDENSING

#### **FOOTPRINT**

20" WIDE x 26" DEEP x 24" HIGH

#### WEIGHT

45 LBS. PLUS MODULE WEIGHT (APPROXIMATELY 5-7 LBS. EACH)


### OPTIONAL FEATURES


8.5" WIDE LABEL MAXIMUM 10.5" WIDE LABEL MAXIMUM CUSTOM PRODUCT FIXTURES PRECISION X-Y ADJUSTMENT TABLE SMART TAMP (AUTO-RETRACT) TAPERED ROLLER UPGRADE TWO-HAND ANTI TIE-DOWN INPUT **CUSTOM CONFIGURATIONS** PRINT & APPLY WHEN LOOSE-LOOPED WITH THERMAL PRINTER OR COLOR INKJET


LabelMill 2416 Jackson Street Savanna, IL 61074 800-273-4707



www.labelmill.com

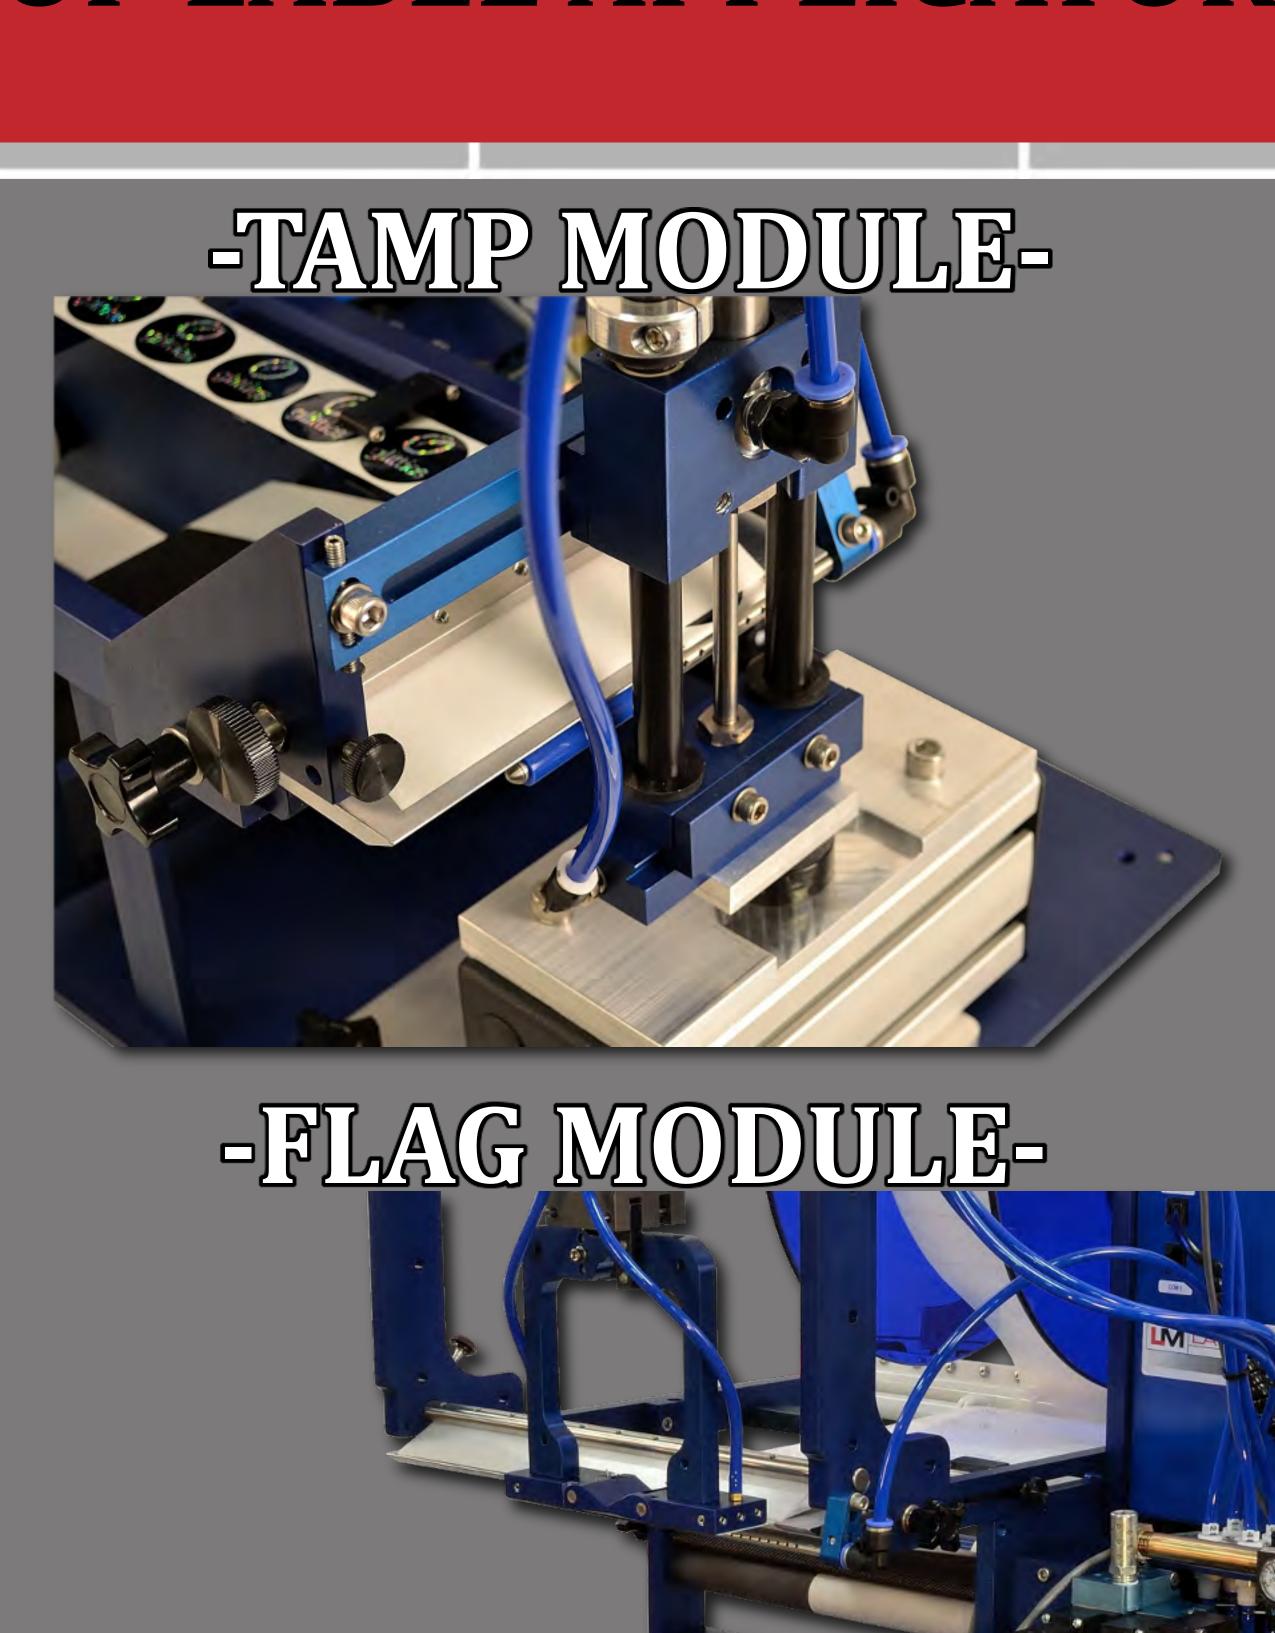

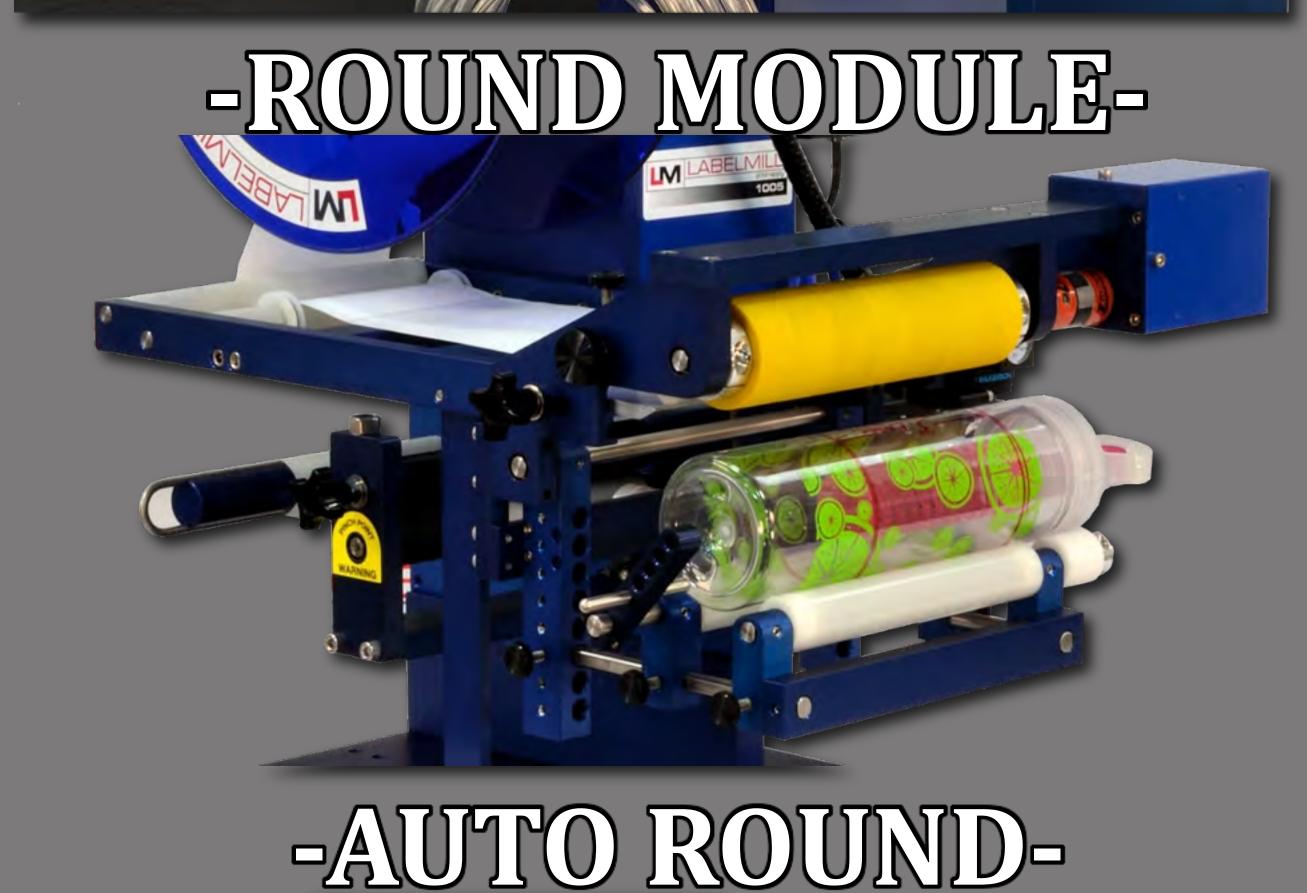

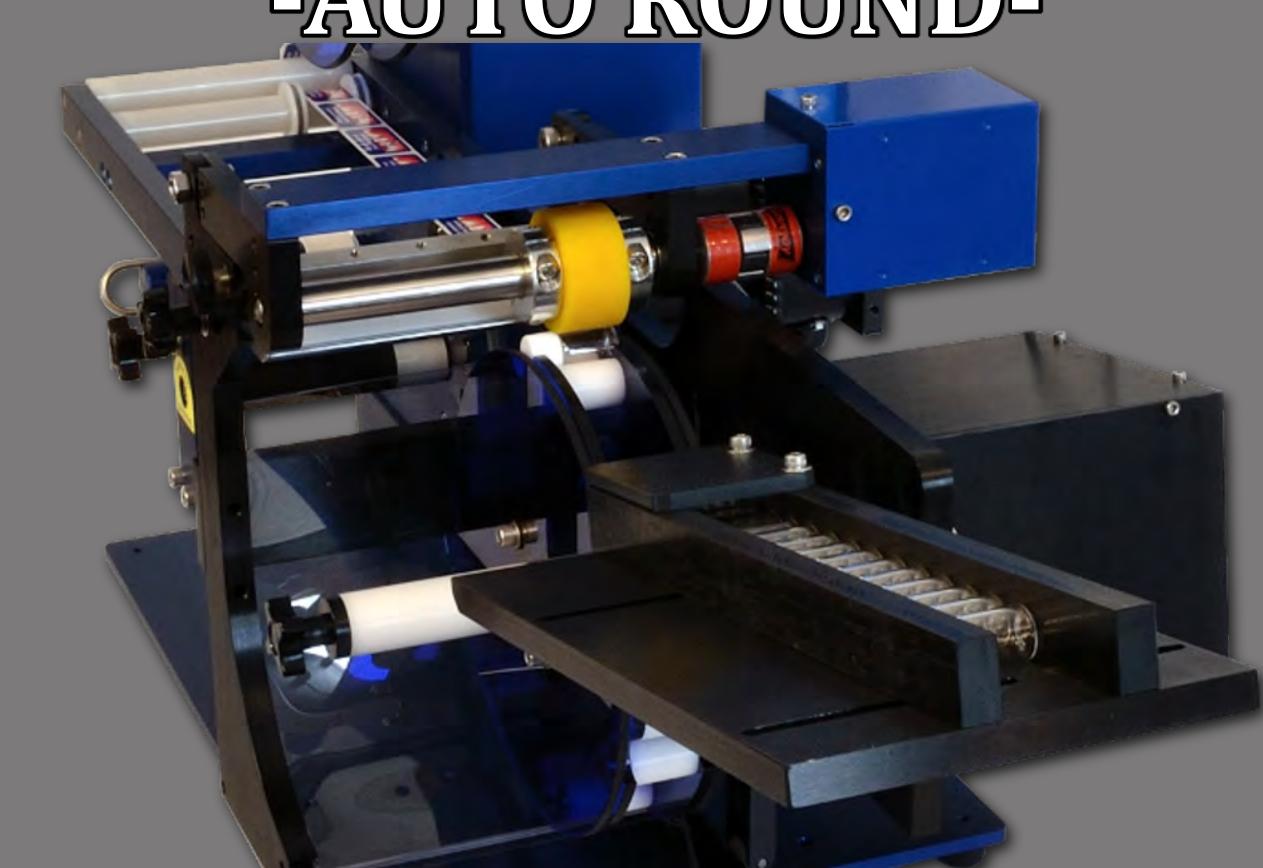

This datasheet is for informational purposes only. MM2 makes no warranties, expressed or implied in this summary. Specifications are subject to change without notice. LabelMill is a registered trademark of Mills Machine II, Inc. © 2022 MM2. All rights reserved.