

# CPX4 Series

*Colorize Your Business, Expand Your Vision*



## Applications



### Office & School

- Name sticker
- ID badge



### Entertainment

- Event pass
- Admission/ticketing



### Manufacturing

- GHS-Compliant/chemical



### SMBs

- Wine label
- Agricultural products
- Gift voucher/greeting card
- Labels for special occasions



### Food & Beverage

- Fresh/raw food label
- Nutrition facts label



### Healthcare

- Medication instruction
- Prescription bottle label



### Logistics

- Shipping label



### Retail

- Product label
- Self-edge/ promotional/ markdown label



**CPX4 Series**, consisting of CPX4P and CPX4D, is an advanced digital label printing solution, allowing for customized label design using pigment or dye based inks with astonishing resolution quality at industry leading speed.

With the benefits of digital label printing, TSC CPX4 Series is capable of producing short-run label widths of 1" (25.4 mm) up to 4.72" (120 mm) with variable data more cost-effectively compared to pre-printed labels. The CPX4 Series makes it easy to create and print out multiple label designs with vibrant color

in less time. With the TSC Color Management program, colors are printed accurately and at a resolution of 1200 x 1200 dpi, images, barcodes, and text are always clear.

The CPX4 Series is a perfect fit for any and all applications to meet the constant influx of new market demands for clear, high quality labels. It's the hassle-free solution for businesses that want flexibility for creating labels without compromising quality and time. And with a one year warranty, TSC provides all around support from our dedicated TSC team.

## Why Digital Printing Matters?

Compared with Pre-Printed market, Digital printing has an astonishing growth rate per year. Digital printing brings considerable benefits for businesses:

### Enhanced Branding

- Full color and customized label designs stand out from the crowd
- Easily deliver unique marketing message for brand loyalty
- Create up to date, fresh, eye-catching visual labels

### High Efficiency

- Demand sensing and quickly produce labels to meet tight deadlines
- Eliminate the wait for ordering, lead-time, and shipment. Quick response!
- Save time by not having to change different pre-printed rolls

### Absolute Flexibility

- Easily print multiple designs and what you need is blank labels
- Manageable print capacity on premise/in house
- No need to worry about MOQ, print on an as-needed basis

### Clear Visibility

- Reduce risk of printing errors on wrong label stock
- Improve business process and workflows with organized color coding

### No More Waste/Cost

- Reduce the cost of over-printing, inventory, and waste
- Eliminate pre-printed label stock holding cost

### Great Versatility


- Variable data printing enables customized styles and a personal touch
- Easily meet a variety of label needs in market sectors

## Key Features & Highlights



### Outstanding Speed

- Line printhead architecture enables Industry-leading print speed of up to 11.8 ips

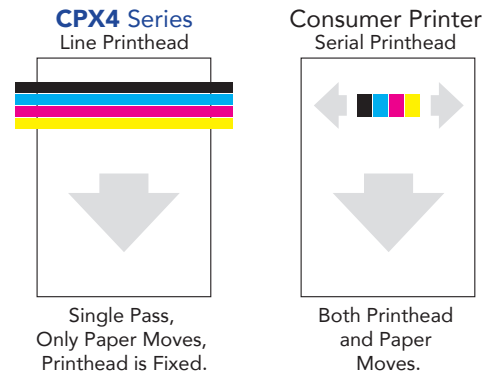


### Extreme Flexibility

- The adjustable media is capable of printing small labels 25.4 mm (width) x 6 mm (length)
- Variable data capability to support custom label designs in house and in less time



### Comprehensive Service

- TSC Color Management Program - Color Matching, allows for colors that are clear and accurate
- All-in-one Warranty Program, Cost Calculation Service and Built-in BarTender UltraLite software included

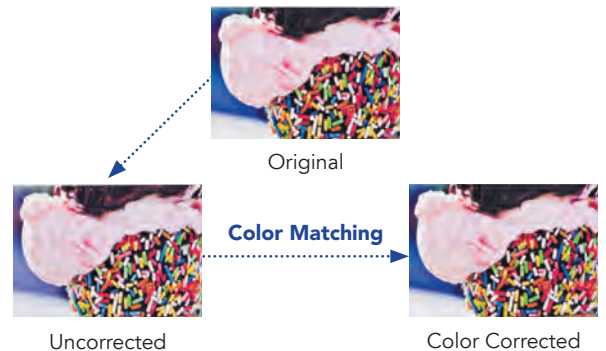

### Exceptional Quality

- Excellent resolution of 1200 x 1200 dpi in vivid color, crisp image and sharp text
- High quality ink sustains its performance properly over time



### Absolute Cost-Effectiveness

- Digital label printing save more money, without waste and obsolescence
- High yield ink cartridges mean fewer change outs




## Industry Compliance

- Capable of delivering GHS-Compliant label and fulfill industry requirements with water, fade, abrasion, and smudge resistant for long-term durability

| Original               |  |                                                                                      |
|------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Media & Ink            | Unqualified                                                                        | Qualified (CPX4P)                                                                    |
| GHS-Compliant (BS5609) |   |   |
| Abrasion-Resistant     |   |   |
| Alcohol-Resistant      |  |  |


## What is the Right Ink Type for Your Application?

### Pigment-based ink: CPX4P

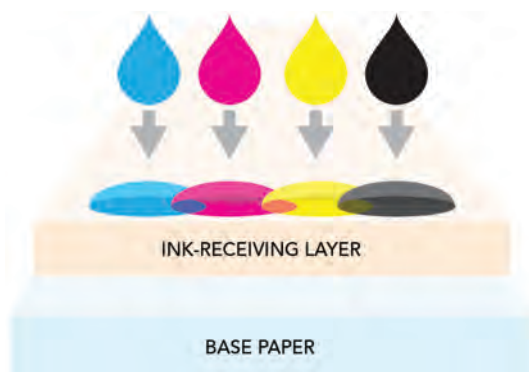

—VS—


### Dye-based ink: CPX4D

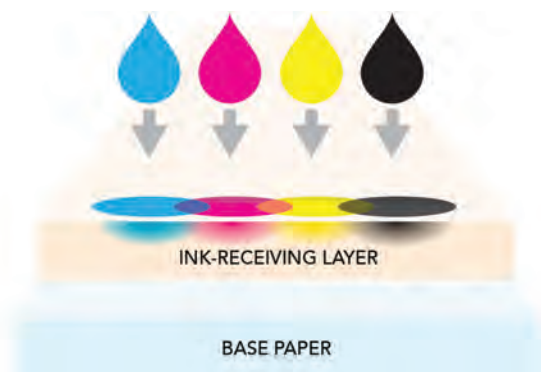

- Powdery substances not dissolved in liquid
- More UV-resistant and fade-resistant
- Best fit for applications demanding longevity and long-term durability



- Water-based substance that is water soluble
- More vivid, vibrant color and broad color range
- Perfect choice for those applications requiring design/ graphs with brilliant color



## CPX4 SERIES – Color Label Printer

| PRINTER MODEL            | CPX4D                                                                                                                                                                                                | CPX4P                                   |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| Ink type                 | Dye Ink                                                                                                                                                                                              | Pigment Ink                             |
| Max. resolution          | 1200 x 1200 dpi                                                                                                                                                                                      |                                         |
| Max. print speed         | 300 mm (11.8")/second at 1200 x 600 dpi                                                                                                                                                              |                                         |
| Max. print width         | 106 mm (4.17")                                                                                                                                                                                       |                                         |
| Max. print length        | 397 mm (15.63")                                                                                                                                                                                      |                                         |
| Physical dimension       | 386 mm (W) x 394 mm (H) x 570 mm (D)<br>15.20" (W) x 15.51" (H) x 22.44" (D)                                                                                                                         |                                         |
| Weight                   | 25.5 kg                                                                                                                                                                                              |                                         |
| Label roll capacity      | 7.9" OD (200 mm), 3" ID (76 mm) core                                                                                                                                                                 |                                         |
| Ink capacity             | 240 ml each (230 ml usable); * Starter ink tank: 105 ml                                                                                                                                              |                                         |
| Ink color                | CMYK                                                                                                                                                                                                 |                                         |
| Interface                | <ul style="list-style-type: none"> <li>• USB2.0 Hi-speed</li> <li>• Ethernet (Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T)</li> </ul>                                                                |                                         |
| Power                    | Input: AC 100-240V, 1.5A, 50-60Hz, 233W                                                                                                                                                              | Input: AC 100V-240V 50/60Hz, 1.4A, 250W |
| Indicator                | 8 LED indicators                                                                                                                                                                                     |                                         |
| Operation switch, button | 3 buttons (Pause, Feed, Back Feed)                                                                                                                                                                   |                                         |
| Media type               | Roll-fed/fanfold, die cut; gap, black mark, continuous; matte paper, glossy paper, PET film, synthetic                                                                                               |                                         |
| Media width              | 25.4 ~ 120 mm                                                                                                                                                                                        |                                         |
| Media length             | 6 ~ 400 mm                                                                                                                                                                                           |                                         |
| Media thickness          | 0.145 ~ 0.255 mm (5.71 ~ 10.04 mil)                                                                                                                                                                  |                                         |
| Media core diameter      | 76.2 mm (3")                                                                                                                                                                                         |                                         |
| Environment condition    | <ul style="list-style-type: none"> <li>• Operation: 15°C ~ 30°C, 10% ~ 90% Relative Humidity (non-condensing)</li> <li>• Storage: 0°C ~ 35°C, 5% ~ 85% Relative Humidity (non-condensing)</li> </ul> |                                         |
| Operating systems        | Windows 10/8.1/Win 7 SP1 (32/64 bit)                                                                                                                                                                 |                                         |
| Safety regulation        | CE, FCC, UL                                                                                                                                                                                          |                                         |
| Accessories              | <ul style="list-style-type: none"> <li>• Starter ink tank</li> <li>• Windows labeling software CD disk</li> <li>• Quick start guide</li> <li>• Power cord</li> </ul>                                 |                                         |
| Warranty                 | 1 year for printer (consumable excluded)                                                                                                                                                             |                                         |
| Options                  | Auto cutter                                                                                                                                                                                          |                                         |

## SUPPLIES – Media

| MEDIA CODE     | MEDIA TYPE        | APPLICATION                                      |
|----------------|-------------------|--------------------------------------------------|
| IJP 100 Series | Matte Paper       | Logistics, Entertainment, Retail                 |
| IJP 300 Series | Gloss Paper       |                                                  |
| IJP 400 Series | Matte White BOPP  | Healthcare, Food & Beverage, SMBs, Office/School |
| IJP 500 Series | Gloss White BOPP  |                                                  |
| IJP 600 Series | Matte, Drum Label | Manufacturing - GHS Application                  |

## SUPPLIES – Ink

| CPX4D           | CPX4P           |
|-----------------|-----------------|
| INK TANK CPX-DC | INK TANK CPX-PC |
| INK TANK CPX-DM | INK TANK CPX-PM |
| INK TANK CPX-DY | INK TANK CPX-PY |
| INK TANK CPX-DK | INK TANK CPX-PK |

# Global Contacts



## CORPORATE HEADQUARTERS

### **TSC Auto ID Technology Co., Ltd.**

Tel: +886 2 2218 6789

E-mail: [apac\\_sales@tscprinters.com](mailto:apac_sales@tscprinters.com)

## LI ZE PLANT

### **TSC Auto ID Technology Co., Ltd.**

Tel: +886 3 990 6677

E-mail: [apac\\_sales@tscprinters.com](mailto:apac_sales@tscprinters.com)

## AMERICAS

### **TSC Auto ID Technology America Inc.**

Tel: +1 657 258 0808

E-mail: [americas\\_sales@tscprinters.com](mailto:americas_sales@tscprinters.com)

## MEXICO

### **TSC Mexico Representative Office**

Tel: +1 52 (33) 3673 1406

E-mail: [americas\\_sales@tscprinters.com](mailto:americas_sales@tscprinters.com)

## BRAZIL

### **TSC Brazil Representative Office**

Tel: +55 (11) 3554 7225

E-mail: [americas\\_sales@tscprinters.com](mailto:americas_sales@tscprinters.com)

## EMEA

### **TSC Auto ID Technology EMEA GmbH**

Tel: +49 (0) 8106 37979 000

E-mail: [emea\\_sales@tscprinters.com](mailto:emea_sales@tscprinters.com)

## RUSSIA

### **TSC Auto ID Technology EMEA GmbH**

Tel: +7 495 249 9017

E-mail: [emea\\_sales@tscprinters.com](mailto:emea_sales@tscprinters.com)

## MIDDLE EAST

### **TSC Auto ID Technology ME Ltd, FZE**

Tel: +971 4 2533 069

E-mail: [emea\\_sales@tscprinters.com](mailto:emea_sales@tscprinters.com)

## ASIA PACIFIC

### **TSC Auto ID Technology Co., Ltd.**

Tel: +886 2 2218 6789

E-mail: [apac\\_sales@tscprinters.com](mailto:apac_sales@tscprinters.com)

## INDIA

### **TSC India Distributor's Office**

Tel: +91 2267 082 465

E-mail: [apac\\_sales@tscprinters.com](mailto:apac_sales@tscprinters.com)

## CHINA

### **Tianjin TSC Auto ID Technology Co., Ltd.**

Tel: +86 22 5981 6661

E-mail: [apac\\_sales@tscprinters.com](mailto:apac_sales@tscprinters.com)

## KOREA

### **TSC Korea Representative Office**

Tel: +82 2 852 3322

E-mail: [apac\\_sales@tscprinters.com](mailto:apac_sales@tscprinters.com)

